

## Portable Compressors **MOBILAIR M 26**

With the world-renowned SIGMA PROFILE   
Free air delivery 2.6 m<sup>3</sup>/min



# MOBILAIR M 26

## Portable compressor with the renowned SIGMA PROFILE <sup>☆☆</sup>



### High performance – perfect for two breakers

Capable of powering two breakers, the M 26 is a powerful and compact portable compressor that combines quiet operation with impressive fuel economy:

- SIGMA PROFIL<sup>☆☆</sup> airend provides more air for less power consumption
- Highly efficient 1:1 drive ensures optimum power transmission for low speed operation and significantly extends service life
- Water-cooled, 3-cylinder Kubota engine with plenty of power in reserve



### Lightweight and service-friendly

A high performance compressor doesn't necessarily mean a heavy compressor. The M 26 delivers maximum power in a compact, lightweight package:

- Rotation-sintered, double-walled sound enclosure provides corrosion- and scratch-resistance to ensure long-term value retention
- Optimal component accessibility for ease of maintenance
- With compact design and an operational weight of less than 500 kg, the unit is particularly manoeuvrable



### Patented Anti-Frost Control for low condensate compressed air

Specially developed for portable compressors, the patented Anti-Frost Control automatically regulates operating temperature in relation to ambient. The benefits speak for themselves:


- Prevents breakers from freezing up
- Significantly extends air-tool service life



### Everything safely under control

The user-friendly control and instrument panel enables all information to be viewed at a glance.

- Operation is made simple via a single switch
- Clear icons further enhance user-friendliness

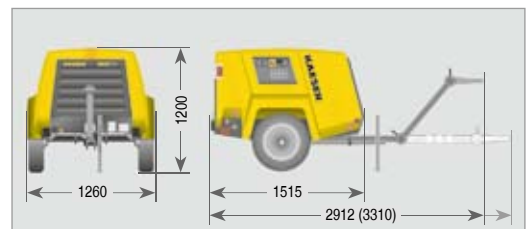

## Technical specifications – MOBILAIR M 26

Model	Compressor unit		3-cylinder diesel engine (water-cooled)					Complete unit				
	Air delivery m <sup>3</sup> /min	Working pressure bar	Make	Model	Rated motor power kW	Speed at full load rpm	Idling speed rpm	Fuel tank capacity l	Operational weight kg	Sound power level dB(A)*	Sound pressure level dB(A)**	Air connection
M 26	2.6	7	Kubota	D1105	17.9	2850	2100	30	498	≤98	69	2x G ¾

\*) Guaranteed sound power level to directive 2000/14/EU – \*\*) Surface sound pressure level to ISO 3744, (r = 10 m)



**KAESER Kompressoren GmbH**

P.O. Box 2143 – 96410 Coburg – GERMANY – Tel: +49 9561 640-0 – Fax: +49 9561 640130  
www.kaeser.com – e-mail: productinfo@kaeser.com